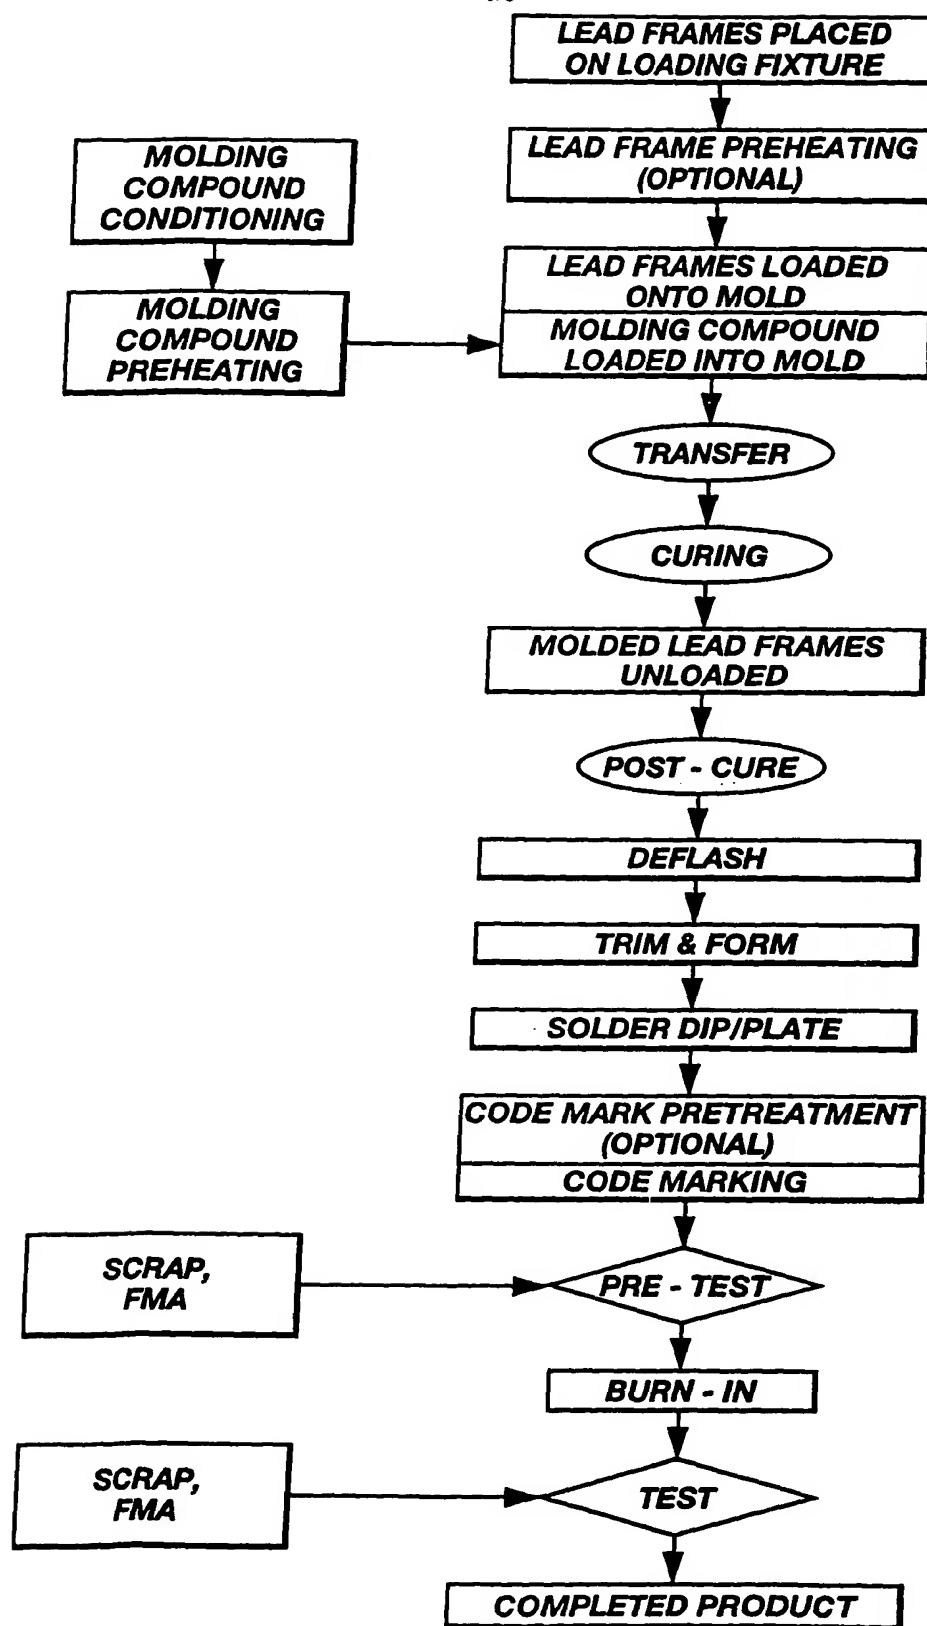


1/8



*Fig. 1
(PRIOR ART)*

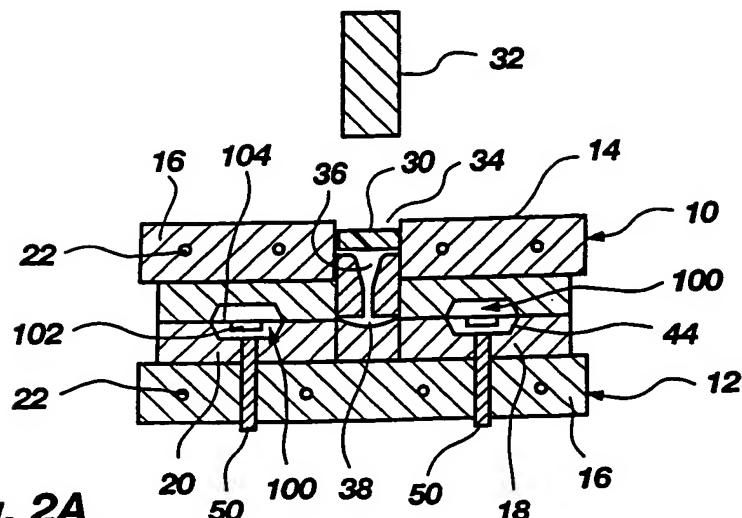


Fig. 2A
(PRIOR ART)

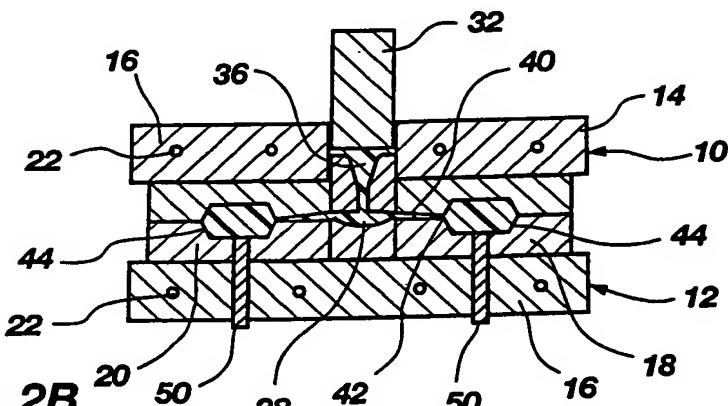


Fig. 2B
(PRIOR ART)

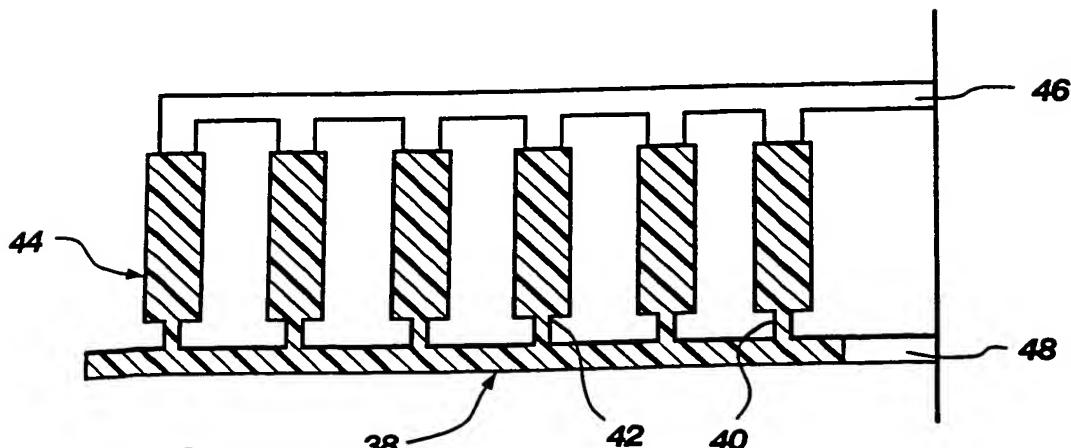


Fig. 3
(PRIOR ART)

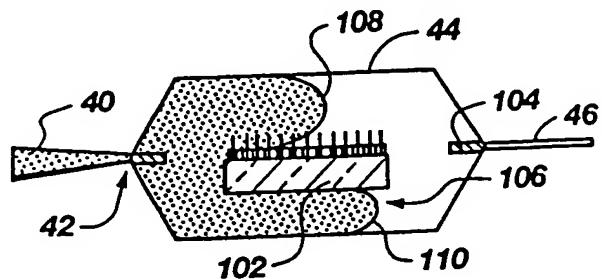


Fig. 4A
(PRIOR ART)

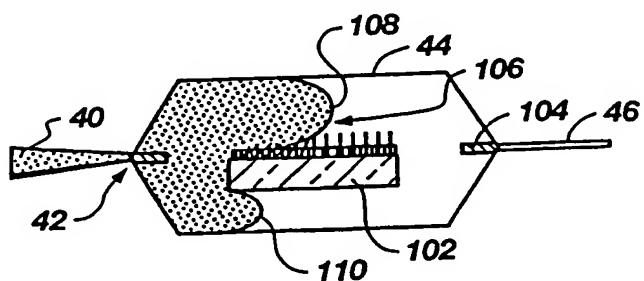


Fig. 4B
(PRIOR ART)

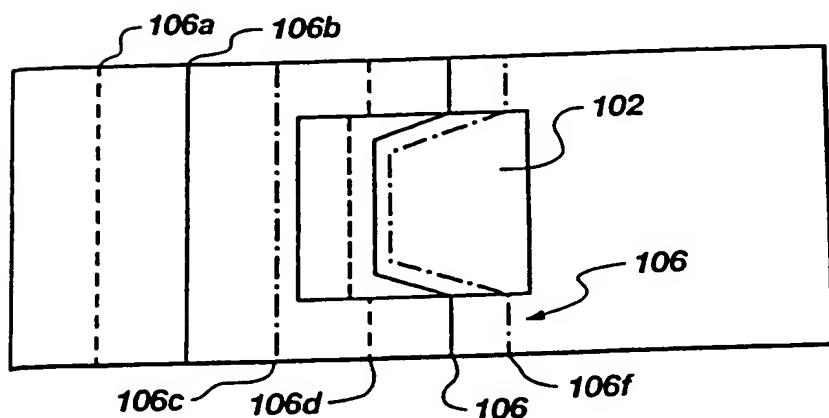


Fig. 4C
(PRIOR ART)

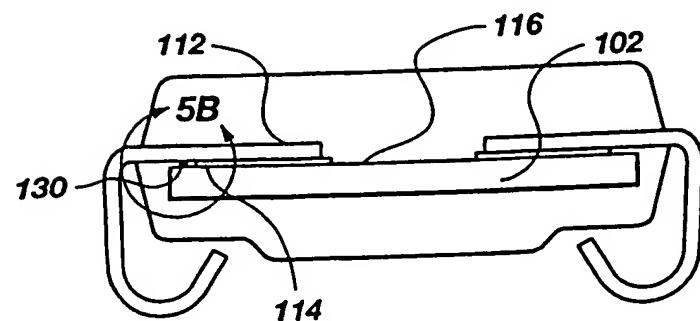


Fig. 5A
(PRIOR ART)

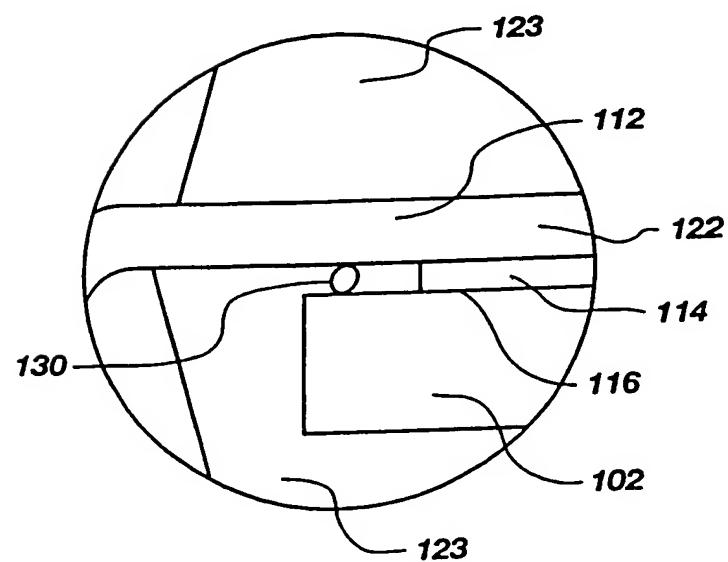


Fig. 5B
(PRIOR ART)

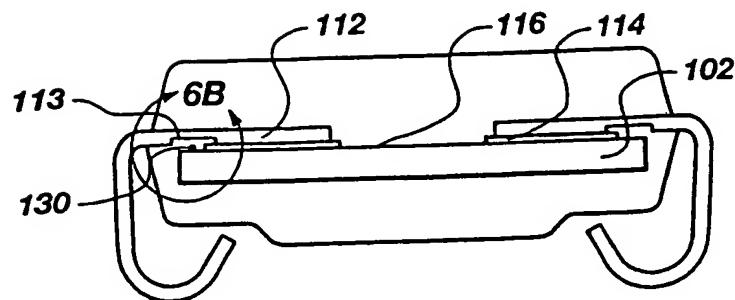


Fig. 6A

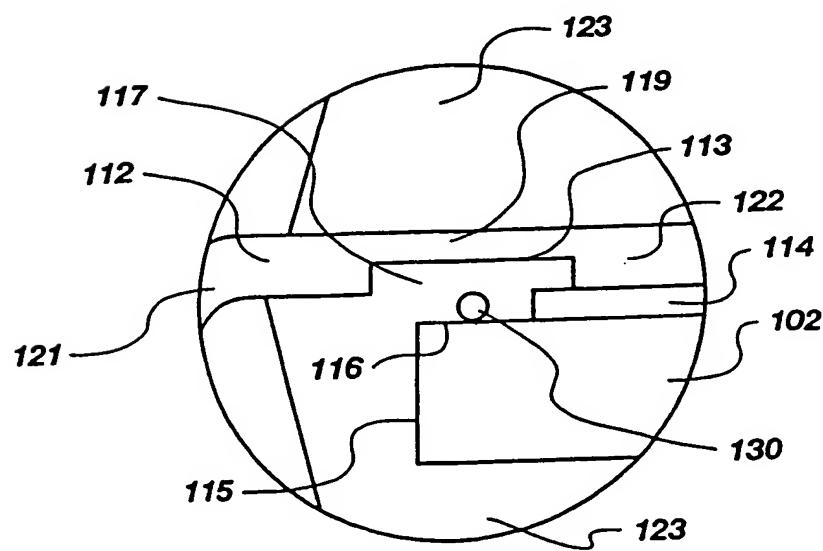


Fig. 6B

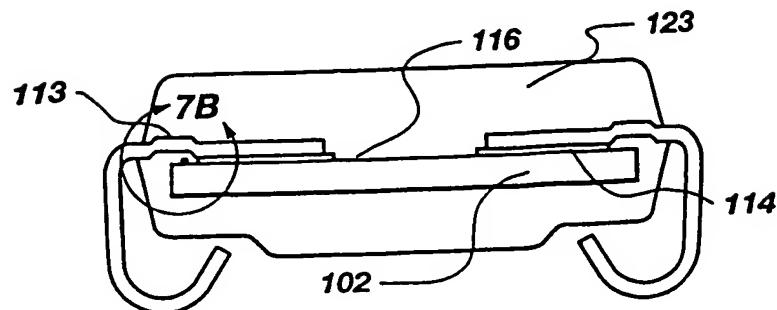


Fig. 7A

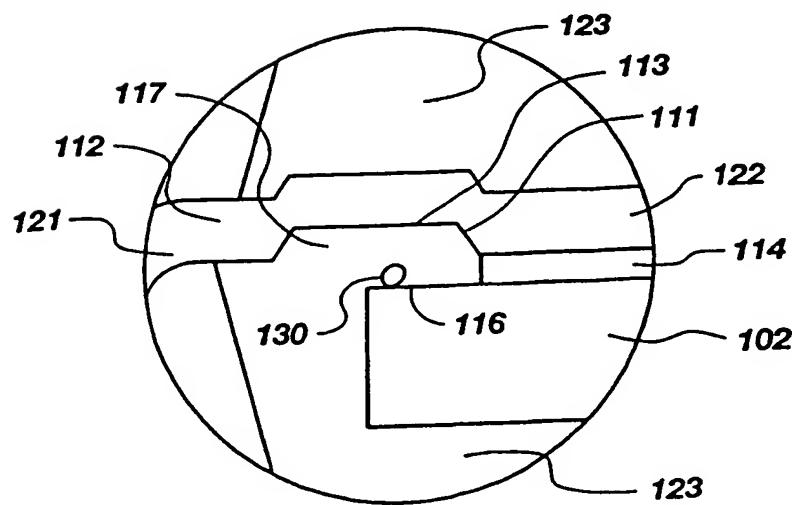


Fig. 7B

TITLE: METHODS FOR STRESS REDUCTION FEATURE FOR LOC
LEAD FRAME
Inventor: Kinsman et al.
Docket No.: 2739.6US

7/8

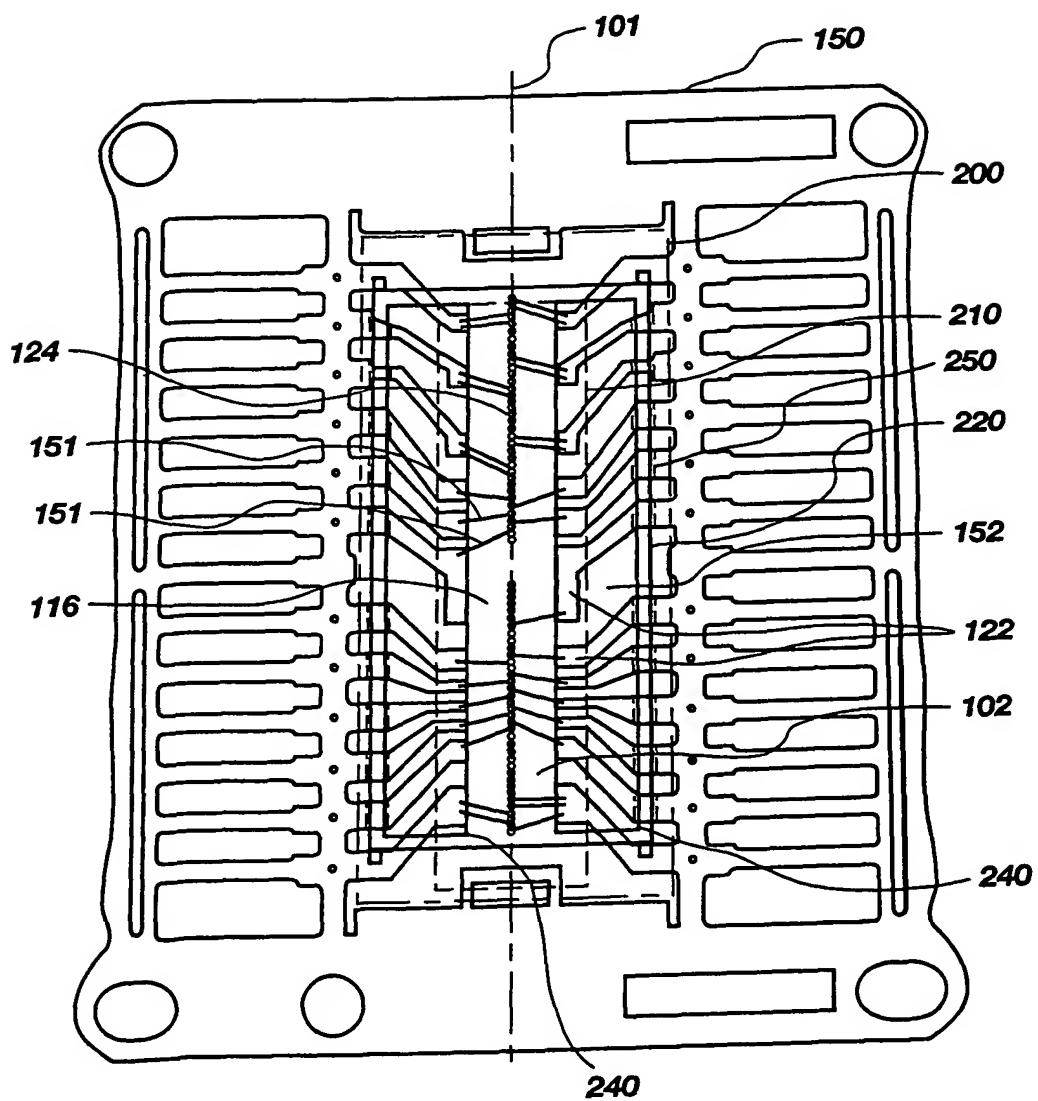


Fig. 8A

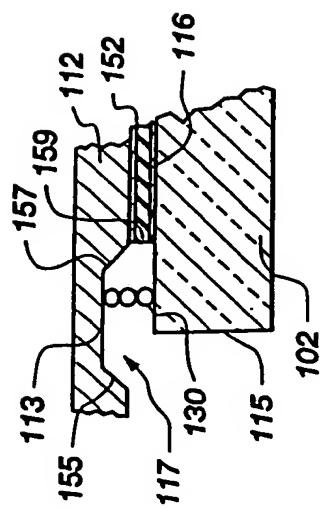


Fig. 10

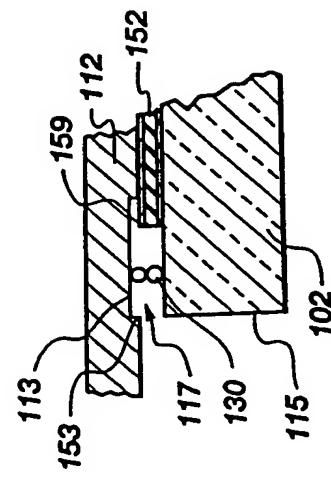


Fig. 9

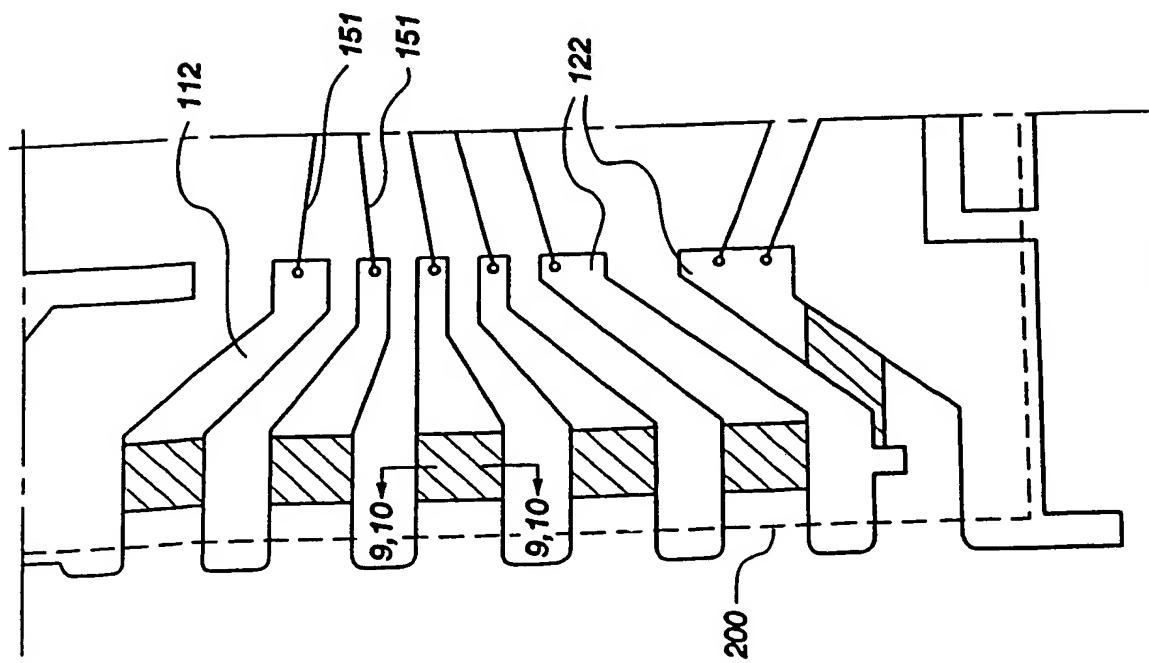


Fig. 8B